
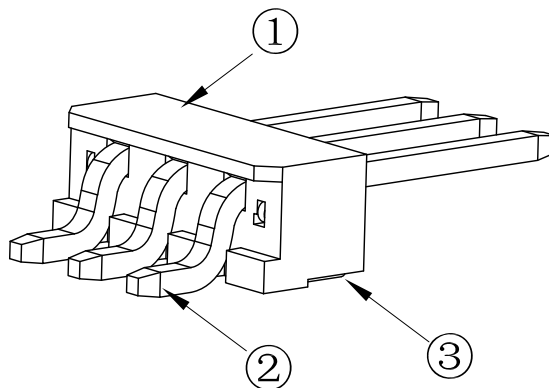


RoHS Compliant

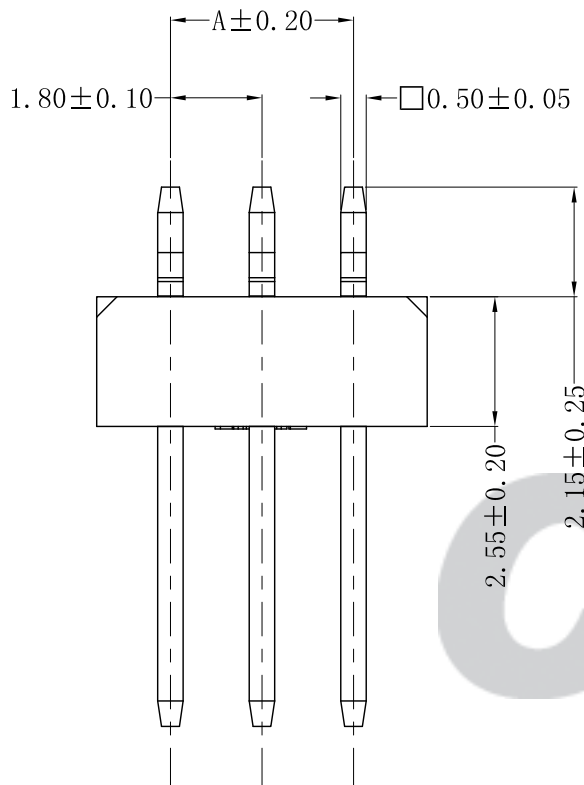

SPECIFICATION

- 1 Contact resistance:  $\leq 20m\Omega$
- 2 Insulation resistance:  $\geq 800M\Omega$
- 3 Rated voltage: 125 V AC DC
- 4 Rated current: 3.0 A AC DC
- 5 Withstand Voltage: 800V AC/minute
- 6 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

**T1802G-\*\*-D1MA-R**

PART No. \_\_\_\_\_


No. OF CIRCUITS: \_\_\_\_\_ PACKAGING: \_\_\_\_\_

02~04 R=Reel



PLASTIC MATERIAL: \_\_\_\_\_ PLATING: \_\_\_\_\_

D1M=PA9T (Nature) A=Tin-plated

Circuit No.	Dimensions	
	A	B
02	1.80	4.70
03	3.60	6.50
04	5.40	8.30

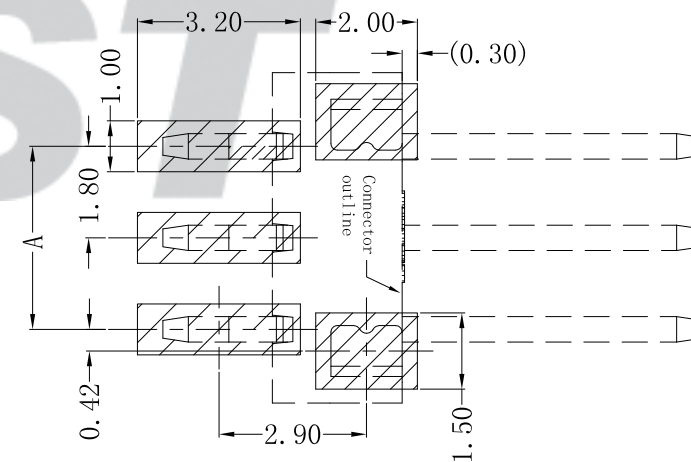

SUGGESTED PCB LAYOUT  
(COMPONENT SIDE)

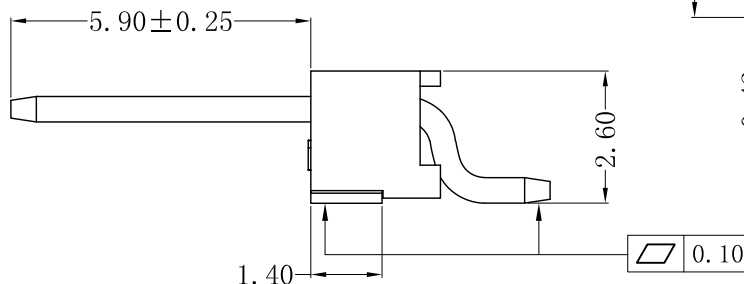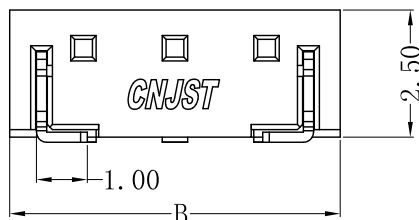

专利产品

Tolerance	X.X ±0.30
	X.XX ±0.20
	X.XXX ±0.10
Angle	±3.0°
UNIT:	mm

**CNJST 捷仕泰企业**

Model No.: T1802G-\*\*-D1MA-R

Model Name: 1.80mm Pitch 90° Wafer-SMT TYPE

SCALE: FULL

REVISION: C/0

Drawn: 李浩然 2023.01.03

Checked: 吴丹平

Approved: 林旭芝

DWG NO.: CNJST/GCCP-0464

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
C/0	2023.01.03	更新模板	李浩然	③	Solder Tab	2	Phosphor Bronze	Matte Sn
B/0	2021.01.07	NEW RELEASE		②	Contacts	02~04	Brass	Tin-plated
				①	Insulator	1	PA9T (UL94V-0)	Nature