
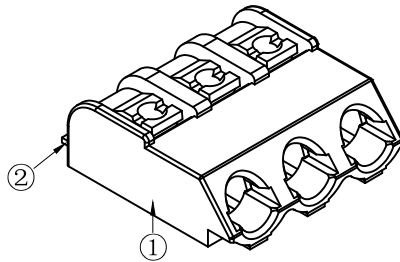






RoHS Compliant

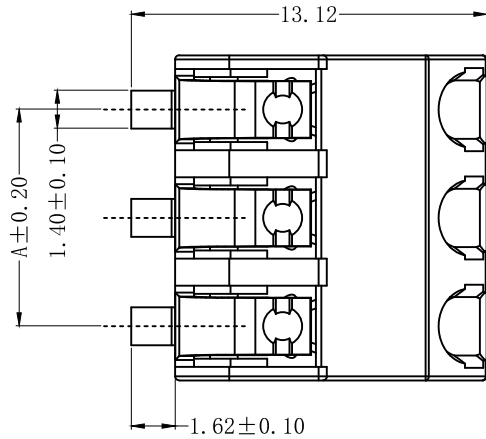


SPECIFICATION

- 1 Contact resistance:  $\leq 20m\Omega$
- 2 Insulation resistance:  $\geq 1000M\Omega$
- 3 Rated voltage: 300 V AC DC
- 4 Rated current: 6.0 A AC DC
- 5 Withstand Voltage: 1600V AC/minute
- 6 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$
- 7 Recommended to use Solid wire AWG#24~18 (0.2~0.75mm<sup>2</sup>)

ORDER INFORMATION:

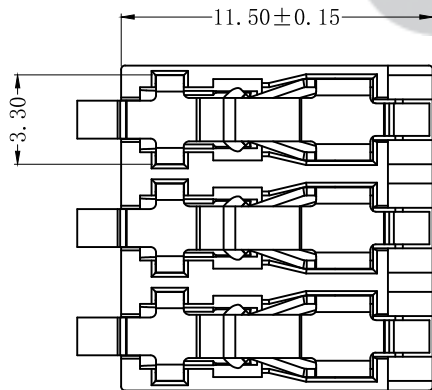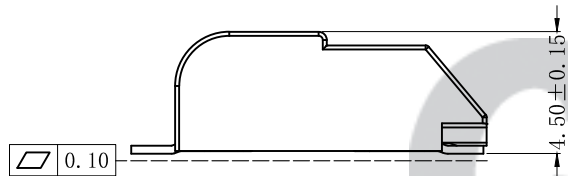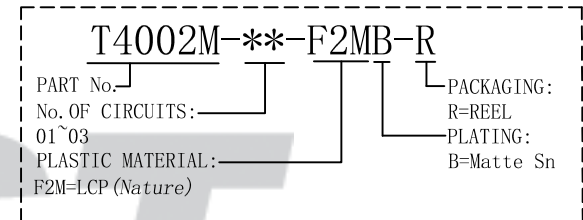

Circuit No.	Dimensions	
	A	B
1P		4.00
2P	4.00	8.00
3P	8.00	12.00

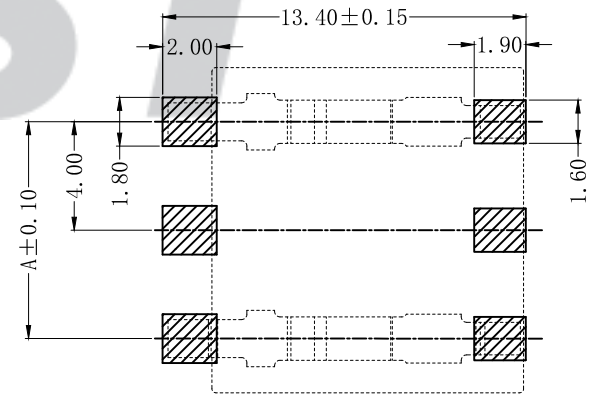

SUGGESTED PCB LAYOUT  
(COMPONENT SIDE)

专利产品

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
C/O	2022.12.09	统一标准 更新模版	黄美程	②	Contacts	1~3	Phosphor Bronze	Matte-Sn
B/O	2019.07.27	NEW RELEASE	黄金林	①	Insulator	1	LCP(UL94V-0)	Nature

Tolerance	X.X ±0.30
	X.XX ±0.20
	X.XXX ±0.10
Angle	±3.0°
UNIT:	mm

**CNJST 捷仕泰企业**

Model No.: T4002M-\*\*-F2MB-R

Model Name: 4.00mm PITCH 90° WAFER

SCALE: FULL

REVISION: C/O

Drawn: 黄美程 2022.12.09
Checked: 吴丹平
Approved: 林旭芝
DWG NO.: CNJST/GCCP-0492