


RoHS Compliant

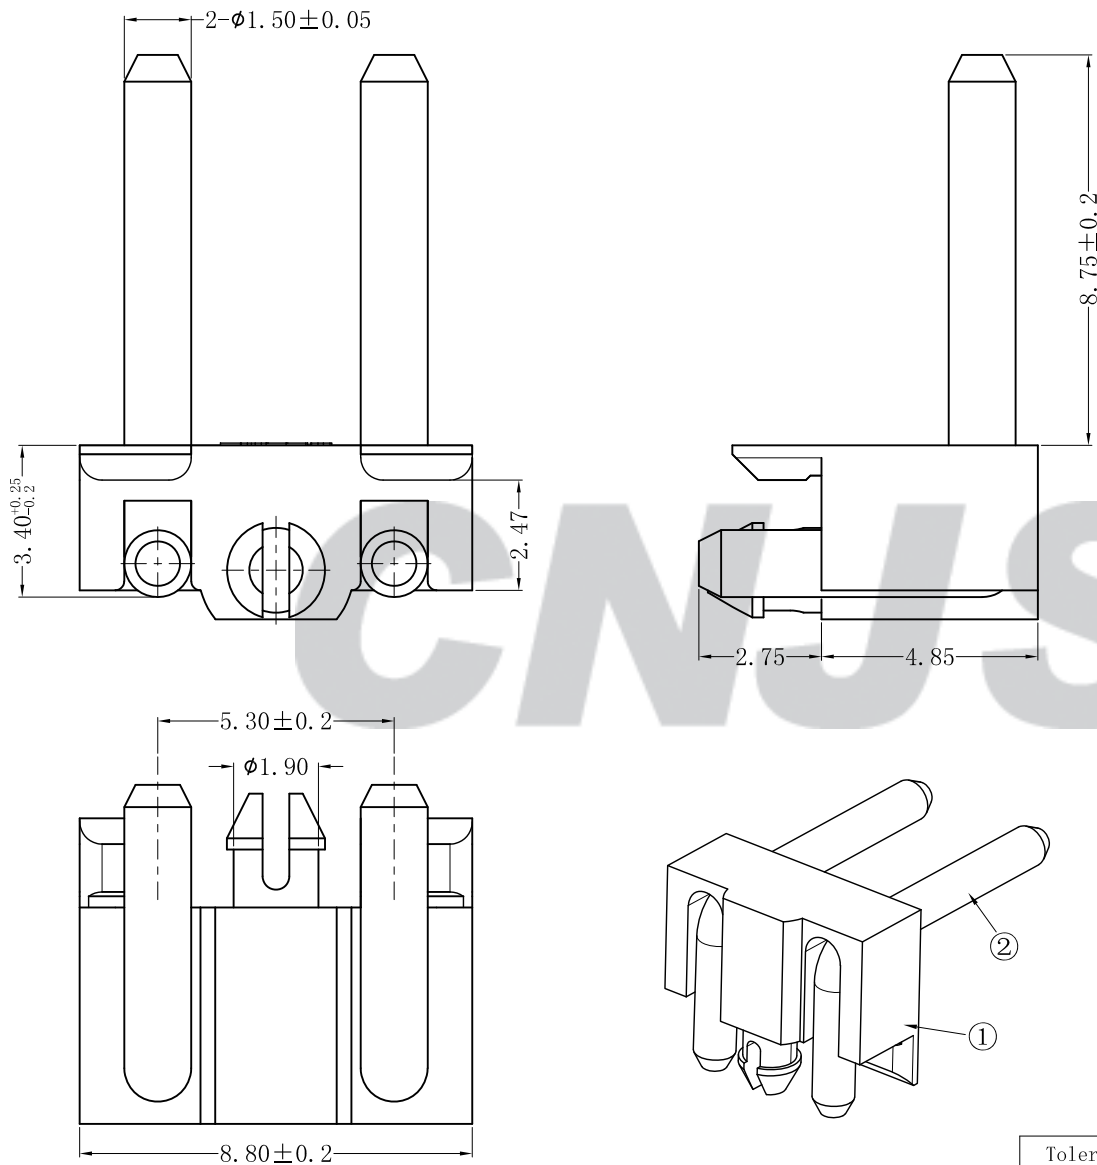


SPECIFICATION

- 1 Contact resistance:  $\leq 20m\Omega$
- 2 Insulation resistance:  $\geq 1000M\Omega$
- 3 Rated voltage: 250V AC DC
- 4 Rated current: 3.0A AC DC
- 5 Withstand Voltage: 2000V AC/minute
- 6 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

<b>T5304G-02-A1MN-A</b>			
PART No.			
No. OF CIRCUITS:	02	PACKAGING:	A=TRAY
PLASTIC MATERIAL:	A1M=PA66 (Nature)	PLATING:	N=Ni

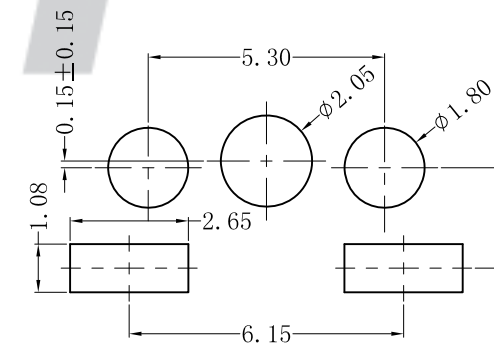

SUGGESTED PCB LAYOUT  
(COMPONENT SIDE)

专利产品

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	<b>CNJST 捷仕泰企业</b>		Drawn: 王丽君 2022. 12. 17
	Model No.: T5304G-02-A1MN-A		Checked: 吴丹平
UNIT: mm	Model Name: 5.30mm Pitch 90° Wafer - DIP TYPE		Approved: 林旭芝
		SCALE: FULL	REVISION: C/0
			DWG NO. CNJST/GCCP-0520

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
C/0	2022. 12. 17	更新模板	王丽君	②	Material	2	Brass	Ni-plated
				①	Insulator	1	PA66 (UL94V-0)	Nature